


## R-606

Equivalent to Burgmann MFL Wt80

Temperature: -20°C~400°C  
Pressure: ≤2.5 MPa  
Velocity: ≤15 m/s


Температура: -20°C~400°C  
Давление: ≤2.5 МПа  
Скорость: ≤15 м/сек

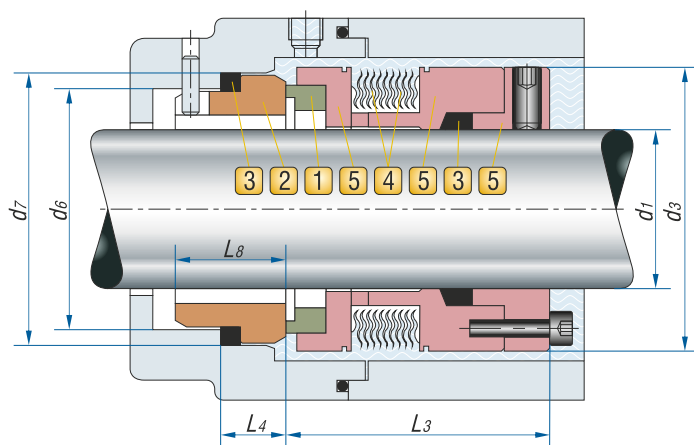

R-606 (mm)


|           | d1<br>(h6) | d3<br>(Max) | d6  | d7<br>(H8) | L3<br>(±0.5) | L4   | L8   |
|-----------|------------|-------------|-----|------------|--------------|------|------|
| R-606-18  | 18         | 40          | 31  | 37         | 46.5         | 11.5 | 19.5 |
| R-606-20  | 20         | 42          | 34  | 40         | 46.5         | 11.5 | 19.5 |
| R-606-22  | 22         | 44          | 37  | 43         | 46.5         | 11.5 | 19.5 |
| R-606-24  | 24         | 46          | 37  | 43         | 46.5         | 11.5 | 19.5 |
| R-606-25  | 25         | 47          | 39  | 45         | 46.5         | 11.5 | 19.5 |
| R-606-28  | 28         | 50          | 42  | 48         | 46.5         | 11.5 | 19.5 |
| R-606-30  | 30         | 52          | 44  | 50         | 46.5         | 11.5 | 19.5 |
| R-606-32  | 32         | 54          | 49  | 56         | 46.5         | 14.0 | 22.0 |
| R-606-33  | 33         | 55          | 49  | 56         | 46.5         | 14.0 | 22.0 |
| R-606-35  | 35         | 57          | 51  | 58         | 46.5         | 14.0 | 22.0 |
| R-606-38  | 38         | 60          | 54  | 61         | 46.5         | 14.0 | 22.0 |
| R-606-40  | 40         | 66          | 56  | 63         | 47.5         | 14.0 | 22.0 |
| R-606-43  | 43         | 69          | 59  | 66         | 47.5         | 14.0 | 22.0 |
| R-606-45  | 45         | 71          | 62  | 70         | 47.5         | 15.0 | 23.0 |
| R-606-48  | 48         | 74          | 65  | 73         | 47.5         | 15.0 | 23.0 |
| R-606-50  | 50         | 76          | 67  | 75         | 47.5         | 15.0 | 23.0 |
| R-606-53  | 53         | 79          | 70  | 78         | 47.5         | 15.0 | 23.0 |
| R-606-55  | 55         | 81          | 72  | 80         | 47.5         | 15.0 | 23.0 |
| R-606-58  | 58         | 85          | 75  | 83         | 53.0         | 15.0 | 23.0 |
| R-606-60  | 60         | 87          | 77  | 85         | 53.0         | 15.0 | 23.0 |
| R-606-63  | 63         | 90          | 81  | 90         | 53.0         | 18.0 | 26.0 |
| R-606-65  | 65         | 92          | 83  | 92         | 53.0         | 18.0 | 26.0 |
| R-606-68  | 68         | 95          | 88  | 97         | 53.0         | 18.0 | 26.0 |
| R-606-70  | 70         | 97          | 88  | 97         | 53.0         | 18.0 | 26.0 |
| R-606-75  | 75         | 102         | 95  | 105        | 52.8         | 18.2 | 26.2 |
| R-606-80  | 80         | 107         | 100 | 110        | 52.8         | 18.2 | 26.2 |
| R-606-85  | 85         | 112         | 105 | 115        | 52.8         | 18.2 | 26.2 |
| R-606-90  | 90         | 117         | 110 | 120        | 53.8         | 17.2 | 25.2 |
| R-606-95  | 95         | 122         | 115 | 125        | 53.8         | 17.2 | 25.2 |
| R-606-100 | 100        | 127         | 122 | 134.3      | 54.0         | 20.0 | 30.0 |

### 1 Вращающееся кольцо



Carbon/SiC/TC

### 2 Неподвижное кольцо



SiC/SUS/TC

### 3 Кольца

Exfoliated graphite:G

### 4 Сильфон

Inconel.718:M6  
Am350 Stainless Steel:T6

### 5 Металлические части

NS334 / SUS316.