


R-21UK

Equivalent to John Crane Type21 (UK Standard)

Temperature: **-20°C~150°C**
Pressure: **≤1.5 MPa**
Velocity: **≤13 m/s**

Температура: **-20°C~150°C**
Давление: **≤1.5 мПа**
Скорость: **≤13 м/сек**

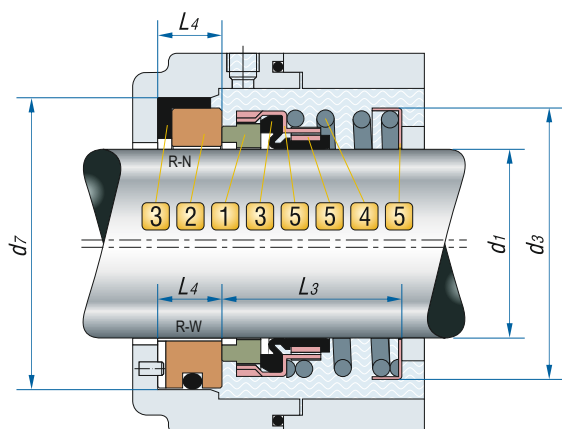

COMBINED MATERIALS

- 1 Rotary Face: Carbon/SiC
- 2 Stationary Seat: Ceramic/SiC/TC
- 3 Flexible Member: NBR/VITON/EPDM
- 4 Spring: Stainless Steel
- 5 Metal Parts: Stainless Steel

Материалы

- 1 Вращающееся кольцо: Ceramic/SiC
- 2 Неподвижное кольцо: Carbon/SiC
- 3 Сильфон: NBR/EPDM/VITON.
- 4 Пружина: Правая (R) / Левая (L).
- 5 Металлические части: SS304/SS316.

R-21UK

	d ₁ (h6)	d ₃ (Max)	d ₇ (H8)	L ₃ (±0.5)	L ₄
R-21-0.375	9.53	20.5	24.60	25.40	8.74
R-21-0.500	12.70	22.5	27.79	25.40	8.74
R-21-0.625	15.87	26.5	30.95	25.40	10.32
R-21-0.750	19.05	34.0	34.15	25.40	10.32
R-21-0.875	22.23	36.0	37.30	25.40	10.32
R-21-1.000	25.40	40.0	40.50	25.40	10.32
R-21-1.125	28.58	42.0	47.63	33.34	11.99
R-21-1.250	31.75	47.0	50.80	33.34	11.99
R-21-1.375	34.93	50.0	53.98	33.34	11.99
R-21-1.500	38.10	55.0	57.15	33.34	11.99
R-21-1.625	41.28	57.0	60.35	33.34	11.99
R-21-1.750	44.45	61.5	63.50	40.48	11.99
R-21-1.875	47.63	65.5	66.70	40.48	11.99
R-21-2.000	50.80	67.5	69.85	40.48	11.99
R-21-2.125	53.98	72.0	73.05	41.00	13.50
R-21-2.250	57.15	78.5	76.20	41.00	13.50
R-21-2.375	60.33	80.0	79.40	41.00	13.50
R-21-2.500	63.50	83.0	82.55	41.00	13.50
R-21-2.625	66.68	88.0	92.10	49.00	15.90
R-21-2.750	69.85	90.0	95.25	49.00	15.90
R-21-2.875	73.03	94.0	98.45	49.00	15.90
R-21-3.000	76.20	99.0	101.65	49.00	15.90

Неподвижное кольцо

Тип (mm): R-N (R-G50)

Тип (inch): R-W

R-21UK

	d ₁ (h6)	d ₃ (Max)	D ₇ (H8)	L ₃ (±0.5)	L ₄
R-21-10	10	20.5	24.60	25.40	8.74
R-21-12	12	22.5	27.79	25.40	8.74
R-21-14	14	26.5	30.95	25.40	10.32
R-21-16	16	26.5	30.95	25.40	10.32
R-21-18	18	34.0	34.15	25.40	10.32
R-21-20	20	36.0	35.70	25.40	10.32
R-21-22	22	36.0	37.30	25.40	10.32
R-21-24	24	40.0	40.50	25.40	10.32
R-21-25	25	40.0	40.50	25.40	10.32
R-21-28	28	42.0	47.63	33.34	11.99
R-21-30	30	45.0	50.80	33.34	11.99
R-21-32	32	47.0	50.80	33.34	11.99
R-21-33	33	50.0	53.98	33.34	11.99
R-21-35	35	50.0	53.98	33.34	11.99
R-21-38	38	55.0	57.15	33.34	11.99
R-21-40	40	57.0	60.35	33.34	11.99
R-21-42	42	59.0	63.50	40.48	11.99
R-21-43	43	59.0	63.50	40.48	11.99
R-21-45	45	65.5	63.50	40.48	11.99
R-21-48	48	67.5	66.70	40.48	11.99
R-21-50	50	67.5	69.85	40.48	11.99
R-21-53	53	72.0	73.05	41.00	13.50
R-21-55	55	78.5	76.20	41.00	13.50
R-21-58	58	80.0	79.40	41.00	13.50
R-21-60	60	80.0	79.40	41.00	13.50
R-21-63	63	83.0	82.55	41.00	13.50
R-21-65	65	88.0	92.10	49.00	15.90
R-21-70	70	90.0	95.25	49.00	15.90
R-21-73	73	94.0	98.45	49.00	15.90
R-21-75	75	99.0	101.65	49.00	15.90